


SECURIT

SETTING THE COMBINATION TO YOUR NEW LOCK.

1.

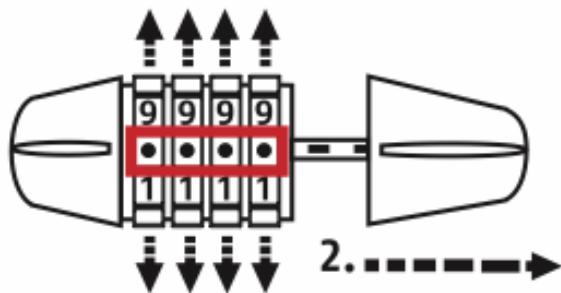


Turn the number dials to the 0000 position, and pull the lock body open.

2.



Turn the lock endcap counter-clockwise approximately 90° until it clicks in place.

3.

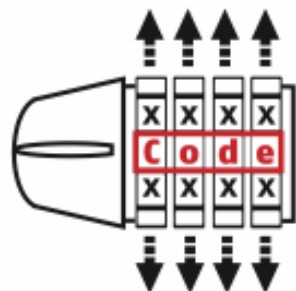


Set the desired combination code you would like to use. Being sure to memorize or write it down somewhere safe.

4.



Rotate the lock endcap clockwise 90° until it click into place in the original position.

5.

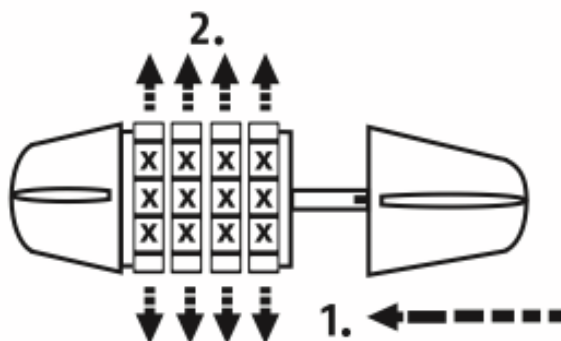

The new combination is now set. The combination can be changed by following the same step with the set combination in place of the original 0000 factory code.